



# TRAMEX™

## Concrete Encounter CME 4 for measuring moisture content ... instantly ... in concrete floors and floor screeds without the need to drill or damage the surface.

### SCREEDS AND CONCRETE FLOORS MUST BE DRY BEFORE THE FLOOR COVERING IS INSTALLED

- Regular checking of moisture content during the drying out period of a new concrete floor or floor screed is important to ensure it has reached sufficient dryness to accept the floor covering.
- Excess moisture in the concrete could cause latent problems such as condensation or failure of the adhesive under the floor covering.
- The Concrete Encounter CME 4 will give you an instant reading of moisture content to over 6% for Concrete and 0 to 10 comparative for Gypsum floor screeds enabling you to make an informed decision on when to install the floor covering.
- To use, simply switch on and press down the instrument firmly against the surface. Carry out unlimited non-destructive tests in seconds without the need to drill or damage the concrete.

### SPECIFICATIONS

Size: 150mm x 85 mm x 38 mm  
6" x 3" x 1.5"

Weight: 298 g (10.5oz)

Construction: ABS Body

Power: 9 volt PP3 Battery

Display: Analog

Measuring Range:

To over 6% moisture content for Concrete.  
0 to 10 comparative for Gypsum floor screed.  
0 to 100 Reference scale.

### HOW IT WORKS



Signals are transmitted into the Concrete

Co-planer electrodes on the base of the Concrete Encounter CME 4 transmit parallel low frequency signals calibrated to give average moisture content by comparing the change in impedance between damp and acceptably dry concrete.

### DESIGNED FOR THE FLOORING INDUSTRY

Tramex has been designing, manufacturing and marketing worldwide, non-destructive moisture meters for more than 30 years. You can, therefore, purchase with confidence assured, that you are getting the latest, most practical and useful, moisture measurement instrument available to the flooring industry. Recommended by many leading manufacturers of floor covering materials and flooring adhesives.

### WARRANTY

The Concrete Encounter CME 4 carries a full parts and labour warranty for a period of one year from the date of first purchase. In addition the purchaser is entitled to a full refund if the instrument does not give full satisfaction and is returned in original condition within 30 days of purchase.

FOR MORE INFORMATION ON THE ABOVE OR ANY OF THE TRAMEX RANGE OF MOISTURE MEASUREMENT AND DETECTION INSTRUMENTS PLEASE CALL, FAX, E-MAIL OR WRITE TO:

TRAMEX LTD.  
Station House,  
Shankill Business Centre,  
Shankill, Co. Dublin, Ireland  
Tel: +353-1-282 3688  
Fax: +353-1-282 7880  
E-Mail: sales@tramex.ie  
Web Site: www.tramex.ie

U.S.A. AND CANADA  
TRAMEX LTD.  
c/o Black Hawk Sales Inc.,  
28 Pin Oak Drive, Littleton, CO 80127  
Tel: 303 972 7926  
Fax: 303 972 7106  
E-Mail: sales@tramexltd.com  
Web Site: www.tramexltd.com

U.K: TRAMEX LTD.  
Tel 0870 735 2870  
E-Mail: sales@tramex.co.uk  
Web Site: www.tramex.co.uk




# TRAMEX™

## Concrete Encounter CME 4

### Features:

- Instant Readings
- Non-destructive in operation
- No need to probe or drill or mechanically damage the surface
- Reproducible results
- Battery Operated
- Pocket Sized
- Clear, easy to read analog dial
- Strong, robust, electrodes and body
- Reading Hold function

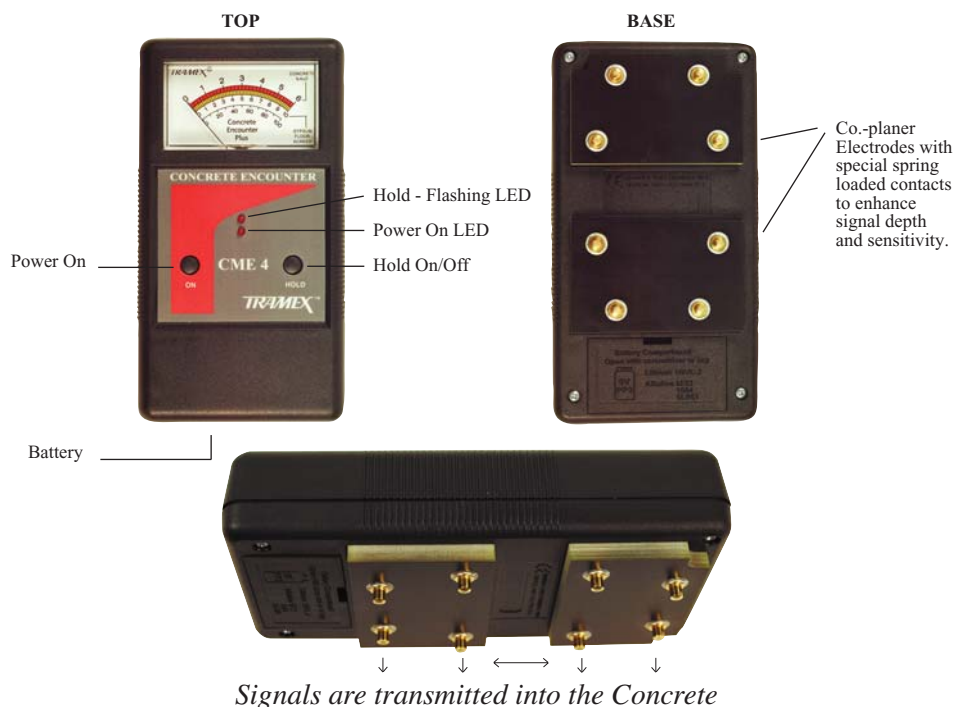

### Product Design:

The Concrete Encounter CME 4 is a hand-held electronic moisture meter operating on the principle of **non-destructive impedance measurement**. Parallel co-planer electrodes are mounted on the base which, during operation, transmit low-frequency signals into the concrete floor screed to a depth of approx. 12.5mm (.5 inch).

While concrete under normal conditions can never be completely dry, the instrument has been calibrated on acceptably dry material. In operation it compares the change in impedance caused by the presence of dampness and displays this on a clear, easy to read analog dial.

### Operating Procedure:

To carry out moisture tests simply brush any dust from a smooth area of concrete and also from electrodes, switch on the Concrete Encounter CME 4 and place firmly onto the surface, fully compressing the spring loaded signal enhancing contacts on the base. Read the moisture content from the clear analog dial.

The CME 4 is calibrated to give percentage moisture content readings on a clean, bare dust free concrete floor slab. Thus, readings taken on concrete slabs through paint, coatings, adhesives or other materials on the surface should be regarded as qualitative or comparative and not quantitative.

**DON'T TAKE RISKS WITH EXCESS MOISTURE!!**  
**Moisture test before you install a floor covering**

Excess moisture in concrete substrate can cause costly problems for the installer. Avoid the risk of having these problems and floor failures by testing for excess moisture before installing a floor. Test the fast, easy, clean and non-destructive way with

# TRAMEX™

## CONCRETE ENCOUNTER CME 4

There's absolutely no surface damage and no waiting!

DISTRIBUTOR:

### FLOORING MANUFACTURERS RECOMMENDED

FOR MORE INFORMATION ON THE ABOVE OR ANY OF THE TRAMEX RANGE OF MOISTURE MEASUREMENT AND DETECTION INSTRUMENTS PLEASE CALL, FAX, E-MAIL OR WRITE TO:

TRAMEX LTD.  
Station House,  
Shankill Business Centre,  
Shankill, Co. Dublin, Ireland  
Tel: +353-1-282 3688  
Fax: +353-1-282 7880  
E-Mail: sales@tramex.ie  
Web Site: www.tramex.ie

U.S.A. AND CANADA  
TRAMEX LTD.  
c/o Black Hawk Sales Inc.,  
28 Pin Oak Drive, Littleton, CO 80127  
Tel: 303 972 7926  
Fax: 303 972 7106  
E-Mail: sales@tramexltd.com  
Web Site: www.tramexltd.com

U.K: TRAMEX LTD.  
Tel 0870 735 2870  
E-Mail: sales@tramex.co.uk  
Web Site: www.tramex.co.uk

Member  
 National  
Wood Flooring  
Association

Member  
 World Floor Covering  
Association